

RESU

Data sheet for RESU10H type-R Secondary
Part number R15563P3SSEG2

RESU10H type-R Secondary
Solaredge compatible

Electrical Characteristics		
Total Energy		9.8 kWh @25°C (77°F)
Usable Energy¹⁾		9.3 kWh @25°C (77°F)
Voltage Range	Charge	400 ~ 450 VDC
	Discharge	350 ~ 430 VDC
Absolute Max. Voltage		520VDC
Max. Charge/Discharge Current		11.9A@420V / 14.3A@350V
Max. Charge/Discharge Power²⁾		5kW
Peak Power (only discharging)³⁾		7kW for 10 sec.
Peak Current (only discharging)		18.9A@370V for 10 sec.
Communication Interface		RS485
DC Disconnect		Circuit Breaker, 25A, 600V rating
Connection Method		Spring Type Connector
User interface		LEDs for Normal and Fault operation
Protection Features		Over Voltage / Over Current / short circuit / Reverse Polarity
Scalability		Max. 2 in parallel
(Total Energy, Max. Charge/Discharge Power, Peak Power (only discharging))		(1 x R15563P3SSEG1 + 1 x R15563P3SSEG2) (19.6 kWh @25°C (77°F), 5KW, 7kW for 10 sec.)

Operating Conditions	
Installation Location	Indoor(Wall-Mounted) / Outdoor
Operating Temperature	14 ~ 113°F (-10 ~ 45°C)
Operating Temperature (Recommended)	59 ~ 86°F (15 ~ 30°C)
Storage Temperature	-22 ~ 131°F (-30 ~ 55°C)
Humidity	5%~95%
Altitude	Max. 6,562ft (2,000m)
Cooling Strategy	Natural Convection

Certification		
Safety	Cell	UL1642
	Battery Pack	UL1973 / CE / RCM / TUV (IEC 62619)
Emissions		FCC
Hazardous Materials Classification		Class 9
Transportation		UN38.3 (UNDOT)
Ingress Rating		IP55

※ Test Conditions - Temperature 25°C, at the beginning of life

※ Total Energy is measured under specific condition from LGC(0.3CCCV/0.3CC)

※ DC/DC Discharge Efficiency 94.5%

1) Value for Battery Cell Only (Depth of Discharge 95%), 2kW charge/discharge power.


2) LG ES recommends 3.3kW for maximum battery lifetime.

3) Peak Current excludes repeated short duration (less than 10 sec. of current pattern).

RESU10H type-R Secondary

Solaredge compatible

Mechanical Characteristics		
Dimensions	Width	744 mm (29.3")
	Height	907 mm (35.7")
	Depth	206 mm (8.1")
Weight	97 kg (214lbs)	

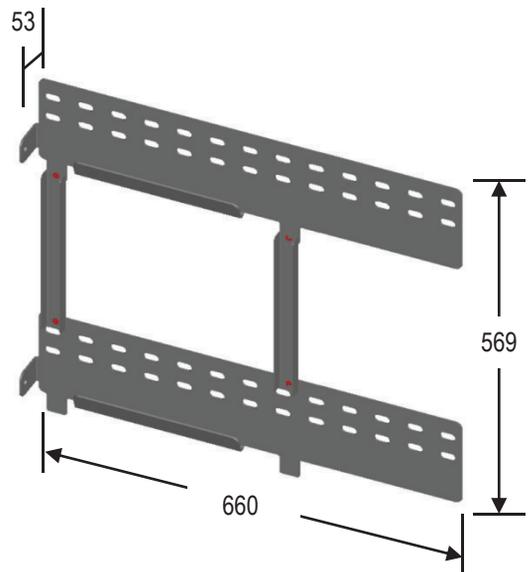



LG Energy Solution

ESS Battery Division

HQ: LG Twin Towers 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Korea. 150-721

TEL : (82) 2-3773-1114 FAX : (82) 2-3773-7005

<http://www.lgessbattery.com> <http://www.lgensol.com/en>